

Based on the axial flow fan selected on previous page, the following steps will determine its motor size, casing length and how to order.

How to select the correct motor size

- 1 Refer to table 2 on page O-11 for full motor details
- 2 Select fan speed column (24 rev/sec) based on fan selected.
- 3 Go down column until motor power (kW) is greater than fan impeller absorbed power (0.65 kW).
- 4 Motor performance data is shown in the same row.
- 5 The motor frame size in this case will be D80_B.


Motor Frame	Motor Shaft Dia.	App. wt. kg**	2 Pole*				4 Pole*				6 Pole*				8 Pole*			
			48 rev/sec				24 rev/sec				16 rev/sec				12 rev/sec			
			kW#	FLA	LRC	Eff%†	kW#	FLA	LRC	Eff%†	kW#	FLA	LRC	Eff%†	kW#	FLA	LRC	Eff%†
D71 _B	14	11	0.37	0.9	6.1	67.7	0.37	1.0	4.1	69.3	-	-	-	-	-	-	-	
D71	14	16	0.55	1.3	6.1	76.0	-	-	-	-	-	-	-	-	-	-	-	
D80 _A	19	18	0.75	1.5	7.0	83.4	0.55	1.4	4.8	72.8	0.37	1.1	2.8	66.5	-	-	-	
D80_B	19	22	1.1	2.2	7.3	84.4	0.75	1.9	7.5	82.2	0.55	1.7	3.1	68.2	-	-	-	

How to determine the fan casing length

- 1 Refer to table 1 on page C-26 for full case dimension details.
- 2 Find fan type/model column (AP/APS).
- 3 Find motor frame size as selected in table above.
- 4 Casing length is determined where the fan type/model column intersects the motor frame size row.

How to order

Based on the details determined on these two pages the axial flow fan can be ordered using the how to order chart below. In this case the product code will be **AP0634AA5/20**

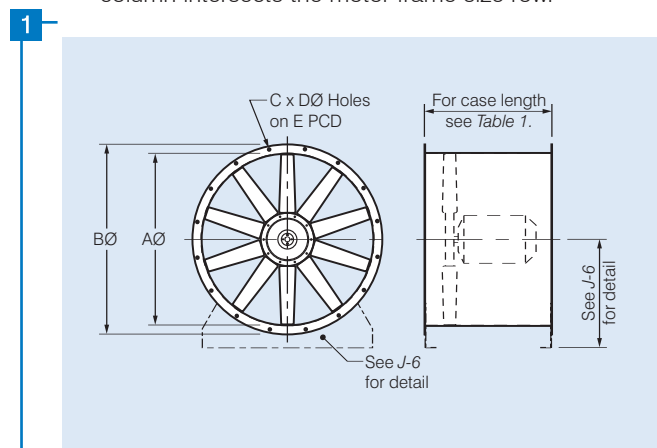

Motor frame size	Casing length, mm		
	AP/APS	APV	APB
D71	300	400	400
D80	400	400	400

AP 0634 AA 5/20

AP - direct drive
 APS - smoke spill
 APB - belt drive
 BFA - bifurcated

Fan diameter in cm

Fan speed, no. of poles

Hub diameter code
 A = 150 D = 400
 B = 250 F = 550
 C = 350 G = 255

Aluminium blades, A
 GRP, P
 Nylon, N
 Antistatic blades, E

No. of blades

Blade pitch angle, deg.